

## MARINE GRADE ANTI-SEIZE

- Protects assemblies exposed directly or indirectly to fresh and salt water
- Works especially well in high humidity conditions
- Excellent lubricity, superior water wash-out water spray resistance
- Prevents galvanic corrosion



**LOCTITE**

Model No.	Mfg. No.	Size	Price /Each
AC338	299175	8 oz.	
TDP003	275026	16 oz.	

## FOOD GRADE ANTI-SEIZE

- Prevents seizure, galling and friction in stainless steel and other metal parts up to 750°F (399°C)



**LOCTITE**

Model No.	Mfg. No.	Size	Price /Each
AC339	#N/A	8 oz.	

## HEAVY-DUTY ANTI-SEIZE

- Metal-free
- Excellent lubricity
- Outstanding lubrication to all metals including stainless steel, aluminum and soft metals up to 2400°F (1315°C)



**LOCTITE**

Model No.	Mfg. No.	Size	Price /Each
AC208	234347	9 oz.	
AC328	209758	1.2 lb.	

## SILVER GRADE ANTI-SEIZE

- Heavy-duty, temperature resistant, petroleum-based lubricant
- Fortified with graphite and metallic flake
- Inert, will not evaporate or harden in extreme cold or heat
- For use in assemblies up to 1600°F (871°C)



**LOCTITE**

Model No.	Mfg. No.	Size	Price /Each
AC347	199012	8 oz.	
YA275	135541	12 oz. aerosol	
YA276	235005	1 lb.	

## COPPER ANTI-SEIZE

- Service rating: -65°F (-54°C) to 1800°F (982°C)
- Lead free, low friction lubricant in a water-resistant grease fortified with anti-oxidants
- Protects against seizure, heat-freeze, galling, rust and corrosion
- Permits reuse of fittings, saves stud, bolt and nut replacements
- Not affected by contraction, expansion or vibration
- Will not run, drip or settle out
- Copper colour



Model No.	Mfg. No.	Size	Price /Each
AA890	C02916	12 oz.	
AA925	C02908	1/2 lb.	
AA874	C02910	1 lb.	

## C5-A® COPPER BASED ANTI-SEIZE

- Suspends copper and graphite in a high quality grease
- Protects metal parts from rust, corrosion, galling, and seizing at temperatures to 1800°F (982°C)



**LOCTITE**

Model No.	Mfg. No.	Size	Price /Each
AC345	234263	8 oz.	
AA533	1786073	12 oz. aerosol	
AB467	160796	1 lb.	

## NICKEL ANTI-SEIZE

- Copper-free
- Recommended for stainless steel and other metal fittings
- For preventing corrosion, seizing and galling in harsh, chemical environments
- For temperatures to 2400°F (1315°C)



**LOCTITE**

Model No.	Mfg. No.	Size	Price /Each
AC337	235028	8 oz.	
AA117	135543	1 lb.	

## ANTI-SEIZE QUICKSTICKS™

- Provides exceptional lubrication, as well as protection against rust, corrosion, seizing and galling
- Reduces friction and wear of critical parts
- Ideal for use in extreme cold and extreme heat applications between -20°F (-29°C) to 1600°F (870°C)
- Stick form offers less mess and portability
- Typical applications include copper, brass, cast iron, all alloys including stainless steel, all plastics and all non-metallic gasket materials
- Perfect for bolts, bushings, pipes, fittings, flanges, gaskets, headers, manifolds, studs and more
- Can withstand the stress of high heat ovens, crane assemblies, turbine studs, coal crushers, casting and molding equipment and heat exchangers



## ALL-PURPOSE ANTI-SEIZE

- Service rating: -65°F (-54°C) to 1800°F (982°C)
- Moly-fortified
- Lead free
- Protects against seizure, heat-freeze, galling, rust and corrosion
- Lowers friction and reduces wrench torque
- Not affected by contraction, expansion or vibration
- Will not harden, evaporate or settle out and requires no thinning
- Steel blue colour



Model No.	Mfg. No.	Size	Price /Each
AA924	C04108	1/2 lb.	
AB475	C04110	1 lb.	


## NICKEL ANTI-SEIZE

- Service rating: -65°F (-54°C) to 2600°F (1427°C)
- Contains no lead, copper, graphite, chlorides, phosphorous, silicone or halogens
- Can be used with ammonia, acetylene and vinyl monomers, which are unstable in the presence of copper
- Protects against seizure, rust and corrosion
- Safe on stainless steel when temperatures exceed 550°F (288°C)
- Prevents water wash-off
- Will not run, drip or settle out
- Silver colour



Model No.	Mfg. No.	Size	Price /Each
AA926	C03908	1/2 lb.	
AB637	C03910	1 lb.	

**LOCTITE**

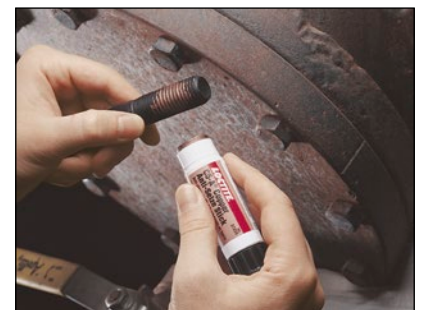

Model No.	Mfg. No.	Format	Grade	Price /Each
AB653	466863	20 g	Copper	
AB654	466864	20 g	Silver	